

REMARKS

The applicant and the applicant's representative, acknowledge, with appreciation, the courtesy extended by the Examiner in granting an interview on November 20, 2001. During the interview a model of the invention was demonstrated. The changes to the drawings were discussed. The amendments to the specification and claims were reviewed.

Please cancel claims 6-13 and 15 as being drawn to a non-elected invention reserving the right to file a divisional application or take other action to preserve the novelty of the invention.

The drawings were objected to because of several informalities. The drawings have been corrected as shown in the red markings to add numerals or to correct numerals as suggested by the Examiner. In addition, it was noted that the work-holding member 26 did not accurately show the end near the elongated opening 20 having a slope downwardly toward the opening and also angularly from the outer portion toward the inner portion. Accordingly, FIGS. 1 and 4-9 have been amended. A duplicate copy of the red marked FIGS. 1, 3-11, 16, and 21-24 are enclosed to a Letter To The Official Draftsman. Also enclosed are formal drawings incorporating the corrections. Also, two sheets of drawings were submitted which included FIGS. 20-22. Please cancel the sheet of drawings which show FIGS. 20-22 and retain the sheet of drawings showing FIGS. 20-24.

An Abstract Of The Disclosure which omits the wording "means" is enclosed herewith on a separate sheet of paper.

The specification on pages 1 and 7-12 has been amended as suggested by the Examiner. Reference numerals have been assigned to the indices and "(not shown)" has been inserted where the

component is not shown in the figures. Concerning page 12, line 19, the specification has been clarified to read:

-- The swivel design of the cutting means 38, the motor 44 and the motor support means 38 with the plates 40 provides a -- .

As shown in FIGS. 14, 15, 17 and 19 the plates 40 swivel as the motor, the support means, and the cutting means are moved to the selected angle (see page 9, lines 8-14 and page 11, lines 12-13). The swivel is "a coupling device that allows free turning of the parts attached to it" (Webster's New International Dictionary, Second College Edition, 1984). It is respectfully submitted that the objections to the specification have been overcome.

Claims 1-5 and 14 were rejected under 35 U.S.C. §112, second paragraph as being indefinite. Claims 1, 3 and 14 have all been amended as suggested to the Examiner to remove the claim to the workpiece. Claims 1 and 3 now recite " ... whereby a workpiece disposed in the work-holding member and extending over the elongated opening will be cut ... ". Claim 14 now recites " ... whereby the workpiece will be supported on the top of the housing and will be arranged .... ".

Claim 2 has been amended to recite " .. wherein the means to move the electrically-powered motor is a rod ... ". The amended claim now clearly sets forth the relationship between the rod and the means to move the motor.

Claim 3, line 1 has been amended to recite " ... wherein said means to move the electrically-powered motor with the cutting means moves ... ". This amended claim discloses the structure which is the "means" to move the cutting means. The expression "such that the workpiece is beveled" has been deleted to avoid claiming the workpiece.


It is respectfully submitted that all of the objections to the drawings, abstract and specification have been fully answered. Also, claims 1-5 and 14 have been amended to remove any indefiniteness.

Accordingly, allowance of claims 1-5 and 14 is respectfully requested.

It appears that all matters have been addressed satisfactorily, and that the case is now in condition for a complete allowance; and the same is respectfully urged.

However, if the Examiner has any comments or questions, or has any suggestions as per MPEP 707.07 (d) and (j), for putting the case in condition for final allowance, he is respectfully urged to contact the undersigned attorney-of-record at the telephone number below, so that an expeditious resolution may be effected and the case passed to issue promptly.

Respectfully submitted,

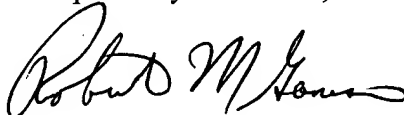

Robert M. Gamson  
Reg. No. 32,986  
Attorney for Applicant

Nov 26, 2001  
Date

LEONARD BLOOM & ASSOCIATES, LLC  
Intellectual Property Law Offices  
502 Washington Avenue, Suite 220  
Towson, MD 21204  
(410) 337-2295

RMG/chb  
Enclosures

CERTIFICATE OF TRANSMITTAL

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as Express Mail in an envelope addressed to: Commissioner of Patents and Trademarks, P.O. Box 327, Arlington, VA 22202.

Date: November 26, 2001

Express Mail Label No. EJ189836537US

By: Shirley A. Bates



RECEIVED

NOV 30 2001

TECHNOLOGY CENTER R3700

**VERSION WITH MARKINGS  
TO SHOW CHANGES MADE  
IN THE ABSTRACT**



Serial No. 09/808,686  
Docket No. 21046-PA

### ABSTRACT OF THE DISCLOSURE

A miter box has a housing with a support [means] within the housing for supporting a motor. The motor drives a cutter [cutting means]. The motor is pivotably disposed with respect to a vertical plane through the housing and is disposed at a desired angular relationship. The  
5 motor may be manually moved by the support [means]. A workpiece is supported on the top of the housing at a selected angular relationship to the cutter [cutting means]. The workpiece may be miter cut and bevel cut simultaneously.

RECEIVED

NOV 30 2001

TECHNOLOGY CENTER R3700

RMG/chb



RECEIVED

NOV 30 2001

TECHNOLOGY CENTER R3700

**VERSION WITH MARKINGS  
TO SHOW CHANGES MADE  
IN SPECIFICATION**



Serial No. 09/808,686  
Docket No. 21046-PA

Page 1, first paragraph

CROSS REFERENCE RELATED APPLICATIONS

Reference is made to Document Disclosure No. 487063 submitted January 12, 2001  
entitled "Dustless Precision Electric Miter Box [box] (DPEMB)".

RECEIVED

NOV 30 2001

TECHNOLOGY CENTER R3700

Page 7, first complete paragraph

As shown in FIGS. 3-5 [3-4], a work-holding member 26 [20] has a channel shape with a base 28 and two opposite side walls 30 extending longitudinally on the base 28 between the first end 32 and the second end 34 of the work-holding member 26. The ends 32, 34 are open, having no walls formed thereon. In this manner a workpiece W may be disposed within the work-holding member 26 between the side walls 30 with the workpiece extending from the first end 32 or from both the first end 32 and the second end 34 as there is no restriction on the length of the workpiece W. The work-holding member 26 further has at least two protrusions 36 extending downwardly from the bottom surface of the base 28. The protrusions 36 [30] may be a peg or pin. One protrusion 36, disposed proximal to the second end 34 of the work-holding member 26, is received in the second curved track 24 on the top surface 14 of the housing 12. At least one, and preferably two, protrusions 36 are disposed proximal to the first end 32 of the work-holding member 26. If there are two protrusions 36', 36'', the protrusions are spaced apart. The protrusions 36', 36'' are received in the first curved track 22. If there are two protrusions, one protrusion 36' is received in one of the inverted "L" portions and the other protrusion 36'' is received in the other of the inverted "L" portions. In this manner, the work-holding member 26 is connected to the top surface 14 of the housing 12.



Page 8, first and second paragraphs

As shown in FIGS. 1, 6-9, 23 and 24, due to the configuration of the first curved track 22 and the second curved track 24, the work-holding member 26 may be slidably moved with respect to the top surface 14 of the housing 12. The protrusion 36 near the second end 34 guides the second end of the work-holding member 26 within the second curved track 24. The protrusion(s) near the first end 32, guide the first end of the work-holding member 26 within the first curved track 22. In this manner, the work-holding member 26 may be moved between 45° and -45° with respect to the elongated opening 20. In order to assure a selected angular disposition of the work-holding member 26, an index 27 is placed on the base 28 [26] of the work-holding member 26 and scalar indices 29 are marked on the top surface 14 of the housing 12 such that the index 27 on the base 26 of the work-holding member 26 may be juxtapositioned to the selected angle for cutting the workpiece W as will be described. When so aligned, the first end 32 [22] of the work-holding means 26 is disposed at a corresponding angle with the elongated opening 20.

On the underside of the top surface 14 (FIG. 10), within the enclosure 18 [14], are a plurality of spaced-apart support means 38. The support means 38 are under, and approximately parallel with, the elongated opening 20. Preferably, the support means 38 are three rails each having a length greater than the length of the elongated opening 20. As shown in FIGS. 11-14, the opposite ends of each rail is mounted on a respective plate 40. Each plate 40 is pivotally connected to the housing 12.

Page 9, first and second paragraphs

A cutting means 48 is connected to the motor 44 such that powering of the motor drives the cutting means 48. The cutting means 48 is disposed in the elongated opening 20 in the top surface 14 of the housing 12 and projects upwardly above the horizontal plane of the top surface 14. Thus, any workpiece W held in the workpiece holder 26 and extending over the elongated opening 20 may be contacted by the cutting means 48 [46]. The cutting means 48 [46] may be a cutting drill bit, a circular saw blade or any other cutting means known to persons skilled in the art. A cutting drill bit sold by Sears under the name "Saber-cut Zip Bits<sup>®</sup>" has been found to be useful.

The end 46a of the rod 46 extending outwardly from the housing 12 serves as a handle. The rod 46 passes through an arcuate slot 42 formed in one of the side walls 16 of the housing 12. As the rod 46 is moved angularly with respect to a vertical plane through the elongated opening 20, the plates 40, the support means 38, the motor 44 and the cutting means 48 are all moved through the same selected angle. It is preferred that a scale 49 ranging from  $-45^{\circ}$  through  $0^{\circ}$  to  $+45^{\circ}$  be formed on the one of the side walls 16 immediately adjacent to the arcuate slot 42. This provides a simple and accurate means to select an angle for bevel cutting the workpiece W. It is also preferred that an electrical switch (not shown) be mounted on the handle 46a of the rod 46 which is exterior to the housing 12. The electrical switch is electrically connected to the electric motor 44 and the motor 44 can be readily energized when positioned as desired.

Page 9, last paragraph bridging page 10 and first complete paragraph

As shown in FIGS. 1, 20-22, a protector 50 is disposed on the top surface 14 of the housing over the elongated opening 20. Preferably, the protector 50 has a frame having two end pieces 52 and at least two shafts 54 therebetween. It is preferred that three shafts 54 be disposed between the end pieces 52. A cover 56 having at least a transparent portion is disposed over the frame. The transparent portion is at the top of the frame so that the cutting operation can be viewed by the operator. The protector also serves to prevent accidental contact with the cutting means 48. The protector may be removable and also may be pivotally mounted along one side so the protector 50 may be pivoted (or flipped) to permit access to the cutting means 48 [38]. In this situation, the protector 50 is interlocked to prevent operation of the cutting means 48 [38] when the protector 50 is not in place over the elongated opening 20. The cover 56 extends downwardly over the frame as a curtain to direct debris and sawdust from the cutting operation downwardly through the elongated opening 20 and away from the operator. It is preferred that the downward extending curtain portion of the cover 56 be formed with a plurality of vertical slits 57 to form fingers. The workpiece W may be easily received under the fingers of the cover 56 and the fingers are effective in directing the debris and sawdust.

A source of vacuum [58] is optional and may be connected to the housing 12 to remove the debris and sawdust from the housing (FIG. 23). The source of vacuum may be connected to the housing 12 by a flexible hose 58 inserted into a fitting or opening in the housing 12. Preferably the flexible hose 58 is connected in the vicinity of the elongated opening 20 to more efficiently remove the debris and sawdust.

Page 11, first and third paragraphs

In use, an operator places the workpiece W in the work-holding member 26 with a portion of the workpiece W being disposed under the protector 50 and over the elongated opening 20. The work-holding member 26 is disposed at an angle to provide the selected angle at which the miter cut is desired. The angle can be set between  $-45^{\circ}$  and  $+45^{\circ}$  as indicated on the scale 29. Miter cuts between  $45^{\circ}$  and  $90^{\circ}$  can be made by turning over the workpiece W. For example, turning the workpiece W over and cutting in the opposite direction at  $30^{\circ}$  can produce a miter cut of  $60^{\circ}$ . The first end of the work-holding member 26 is aligned with the cut line through the elongated opening 20. The work-holding member 26 is locked in the selected angle by pins, screws, clamps, detent means or other means known to persons skilled in the art.

The handle 46a of the rod 46 to control the angular disposition of the motor 44 and cutting means 48 is moved to the selected angle. The handle is locked at the selected angle by pins, screws, clamps, detent means or other means 60 known to persons skilled in the art.

Page 11, last paragraph bridging page 12

The motor 44 is energized by turning on an electrical switch which preferably is mounted on the handle 46a to the rod 46. The switch may be a "trigger" switch. The switch is interlocked with the protector 50 and the motor 44 cannot be energized unless the protector 50 is disposed over the cutting means 46. The source of vacuum, if present, is activated. The operator firmly holds the workpiece W in the work-holding member 26, pressing the workpiece W against one of the side walls 30 of the work-holding member 26. The operator manually moves the handle 46a of [to] the rod 46 by either pushing the handle or pulling the handle so the cutting means 48 engages and cuts the workpiece W at the selected angle. An alternate embodiment (not shown) has a drive motor connected to the rod 46 to provide for powered longitudinal movement of the rod 46, the motor 44 and the cutting means 48. A separate electrical switch connected to the drive motor is mounted on the miter box 10.

Page 12, last paragraph bridging page 13

The miter box of the present invention is an extremely versatile, precision device. The support means 38 for the motor 44 allows the cutting means 48 to be drawn through the workpiece W in a straight, unwavering, and precise manner, ensuring the mitered crosscut to be made at the exact desired location. The swivel design of the cutting means 38, the motor 44 and the motor support means 38 with the plates 40 [for the motor 44] provides a virtual axis to precisely set the bias of the mitered cut from  $+45^\circ$  to  $-45^\circ$  relative to the referenced cut line on the workpiece W being cut. The sliding movement of the work-holding member 26 on the top surface 14 of the housing 12 provides two virtual axes to precisely set the angle of the cut of the workpiece from  $+45^\circ$  to  $-45^\circ$  relative to either edge of the workpiece W. The virtual axis of the bias cut and the virtual axes of the angle cuts are independent of each other thereby allowing precise composite molding miter cuts over the entire adjustable ranges of the bias and angle cuts. The control configuration allows dynamic adjustment of the bias and angle cuts during the cutting process to produce complicated miter cut designs. Thus, as shown in FIG. 28, a bias cut on a single end of a workpiece can be made with a portion cut at  $45^\circ$  and an adjoining portion cut at an angle of  $-45^\circ$  (or any combination of angles between  $+45^\circ$  and  $-45^\circ$ ).

RMG/chb

C:\Corel\Office7\WPWin7\Carolyn\amend\21046amendedspec.wpd



**VERSION WITH MARKINGS  
TO SHOW CHANGES MADE  
IN CLAIMS**

1. (amended) A miter box comprising:
  - a housing having a top surface and a plurality of supporting side walls forming an enclosure,
  - an elongated opening being formed in the top surface of the housing near a first of the supporting side walls,
  - a work-holding member having a first end, the work-holding member being connected to the top surface of the housing such that the work-holding member may be slidably moved with respect to the top surface of the housing to dispose the first end of the work holding member at a selected angle with respect to the elongated opening in the top surface of the housing,
  - a plurality of spaced-apart support means disposed in the enclosure under, and approximately parallel to, the elongated opening in the top surface of the housing,
  - an electrically-powered motor supported on the support means in the enclosure,
  - a cutting means driven by the electrically-powered motor, the cutting means projecting upwardly into the elongated opening in the top surface of the housing, and
  - means to move the electrically-powered motor with the cutting means longitudinally within the elongated opening, whereby [wherein] a workpiece disposed in the work-holding member and extending over the elongated opening will be [is] cut at a predetermined angle corresponding to the selected angle of the work-holding member with respect to the elongated opening.



2. (amended) The miter box of claim 1, wherein the means to move the electrically-powered motor is [further comprising] a rod connected to the electrically-powered motor, the rod extending out of the housing, wherein movement of the rod produces longitudinal movement of the electrically-powered motor such that the cutting means is moved longitudinally with respect to the workpiece.

3. (amended) The miter box of claim 1, [further comprising means to move] wherein said means to move the electrically-powered motor with the cutting means moves the cutting means at a selected angle with respect to a vertical plane through the elongated opening in the top surface, whereby [wherein] the workpiece extending over the elongated opening will be [is] cut at a predetermined angle corresponding to the selected angle of the cutting means [such that the workpiece is beveled].

14. (amended) In a power-driven saw machine for making a miter cut, a bevel cut, or a compound miter-bevel cut in a workpiece, wherein the machine includes a housing, a motor within the housing, and a cutting means driven by the motor and projecting above the housing; the improvement comprising a support means within the housing for supporting the motor for movement within the housing, the motor being pivotably disposed with respect to a vertical plane through the housing and being arranged at a desired angular relationship relative to the vertical plane whenever a bevel cut of the workpiece is intended, and a rod connected to the motor and having an end portion projecting externally of the housing, such that the end portion of the rod

may be manually manipulated for moving the motor along the support means within the housing for making a cut in the workpiece, whereby the workpiece will be [being] supported on top of the housing and will be [being] arranged at an angular relationship relative to the cutting means whenever a miter cut of the workpiece is intended.

RMG/chb

C:\Corel\Office7\WPWin7\Carolyn\amend\21046amendedclaims.wpd

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Watson

Serial No. 09/808,686

Filed: March 15, 2001

For: PRECISION ELECTRIC MITER BOX



Art Unit: 3724

Examiner: Mr. Clark F. Dexter

LETTER TO THE OFFICIAL DRAFTSMAN

RECEIVED

To the Honorable Commissioner  
of Patents and Trademarks  
Washington, DC 20231

NOV 30 2001

TECHNOLOGY CENTER R3700

Dear Sir:

Submitted herewith (in duplicate) for approval are proposed drawing corrections shown in red on the attached drawing copies.

Enclosed herewith are formal drawings on the corrected drawings.

Respectfully submitted,

Date

*Nov 26, 2001*

A handwritten signature in cursive script, appearing to read "Robert M. Gamson".

Robert M. Gamson  
Reg. No. 32,986  
Attorney for Applicant

LEONARD BLOOM & ASSOCIATES, LLC  
502 Washington Avenue  
Suite 220  
Towson, MD 21204  
(410) 337-2295

RMG/chb

C:\Corel\Office7\WPWin7\Carolyn\pto\21046\ltodred.wpd

CERTIFICATE OF TRANSMITTAL

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as Express Mail in an envelope addressed to: Commissioner of Patents and Trademarks, P.O. Box 2327, Arlington, VA 22202.

Date: November 26, 2001

Express Mail Label No. EJ189836537US

By:

A handwritten signature in cursive script, appearing to read "Susan P. B. Bates".

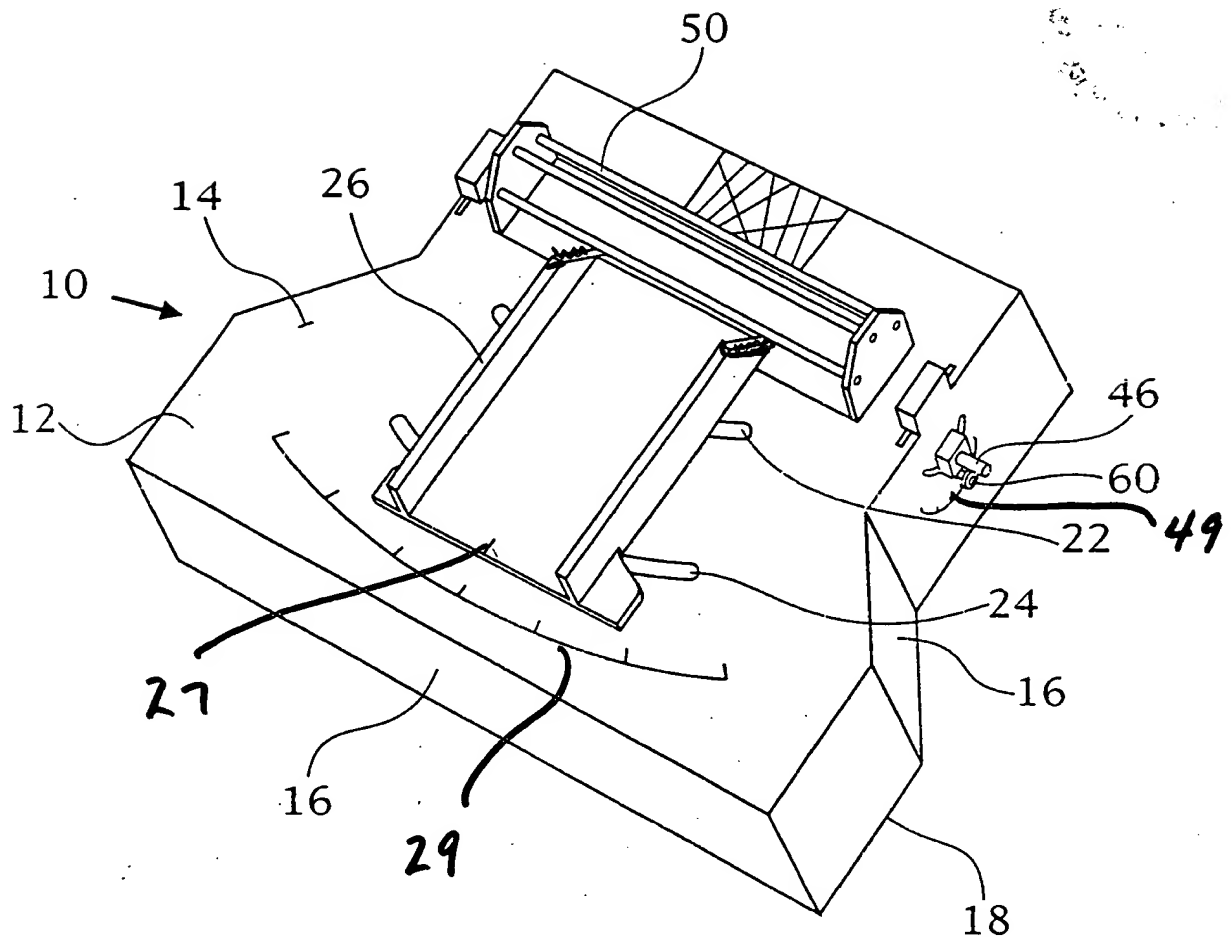


Fig 1

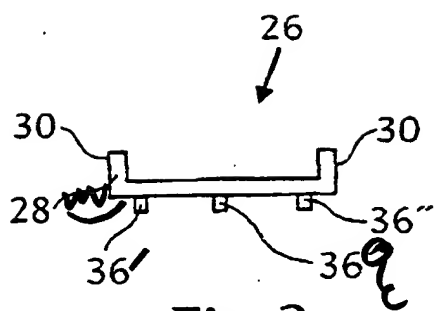


Fig 3

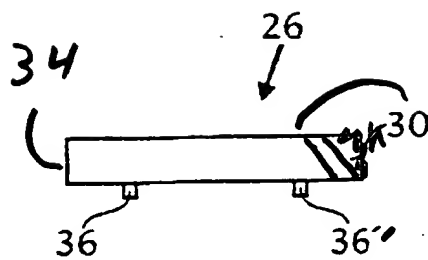


Fig 4

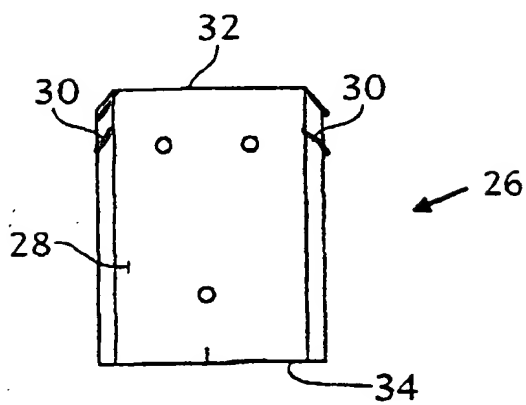
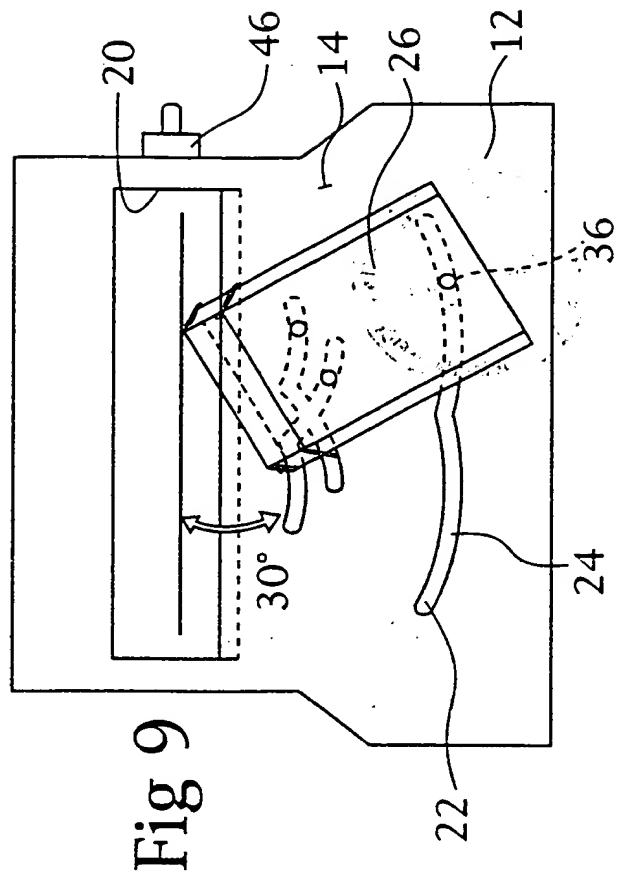
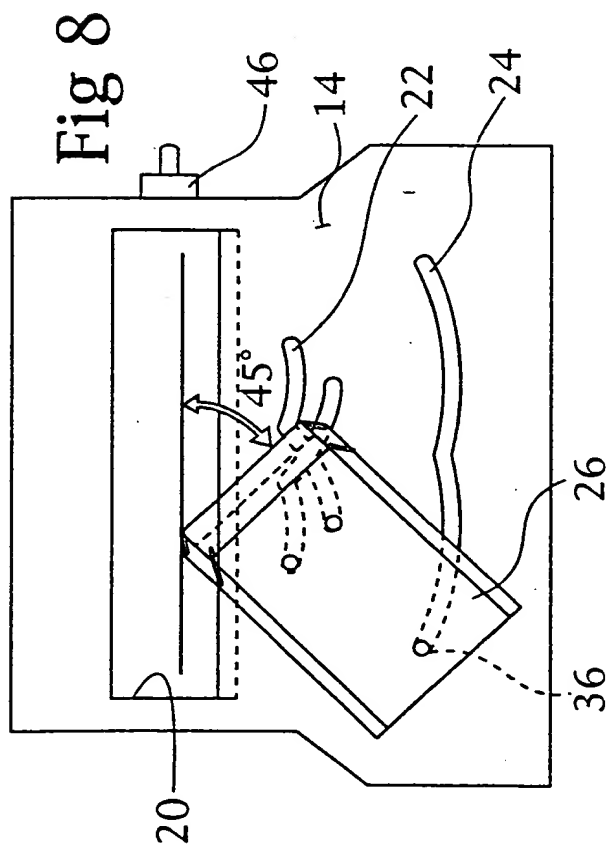
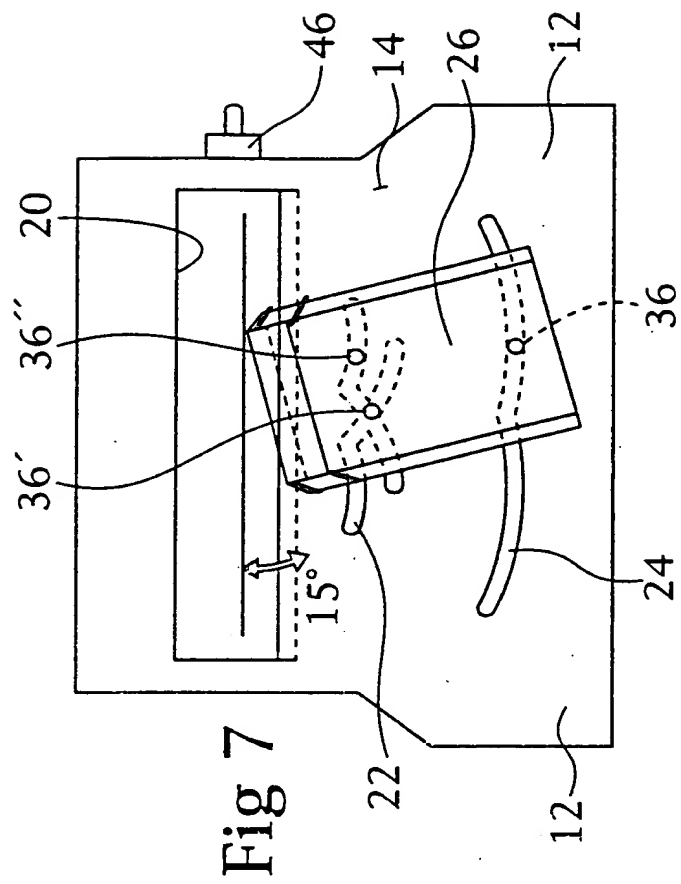
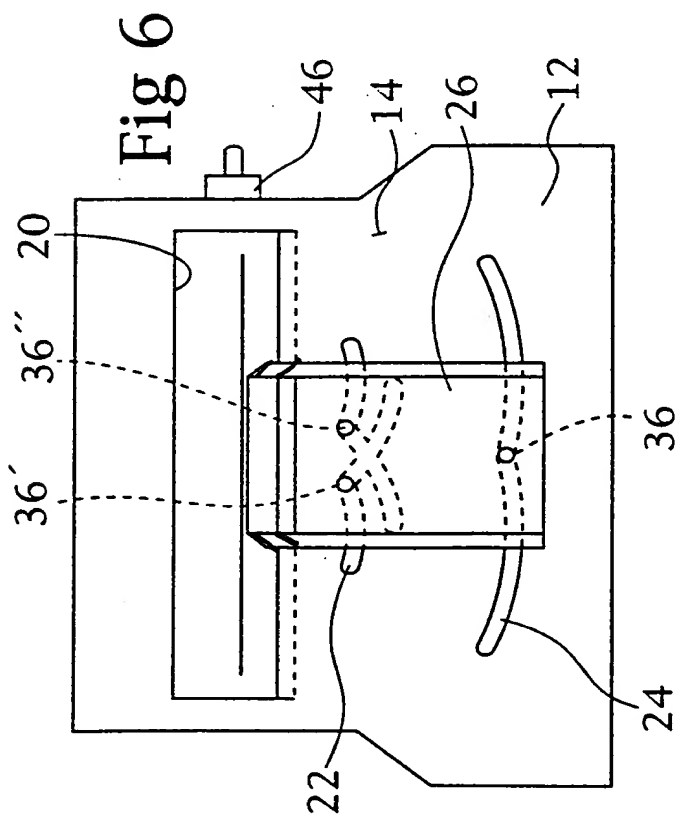


Fig 5



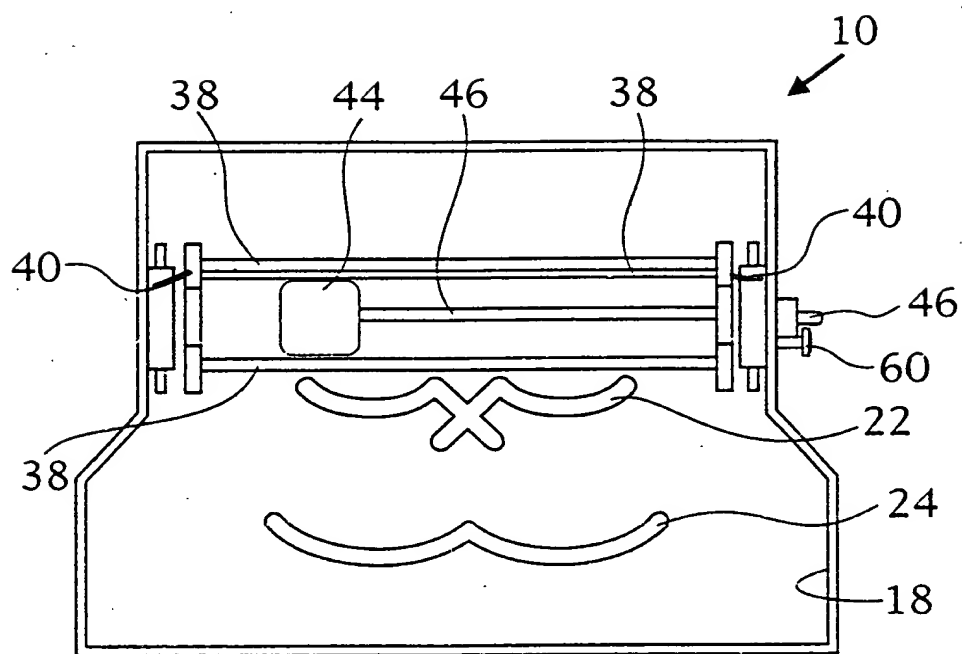
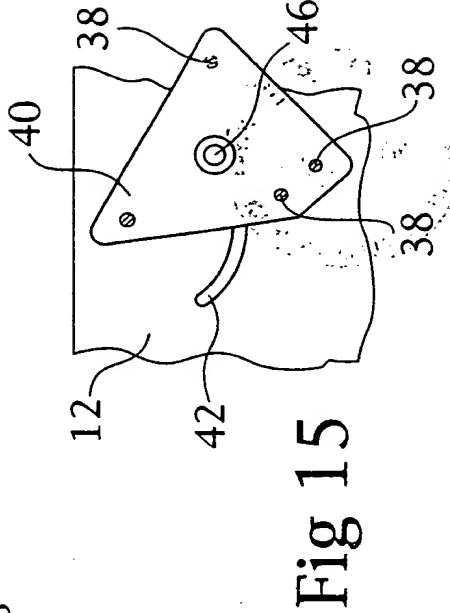
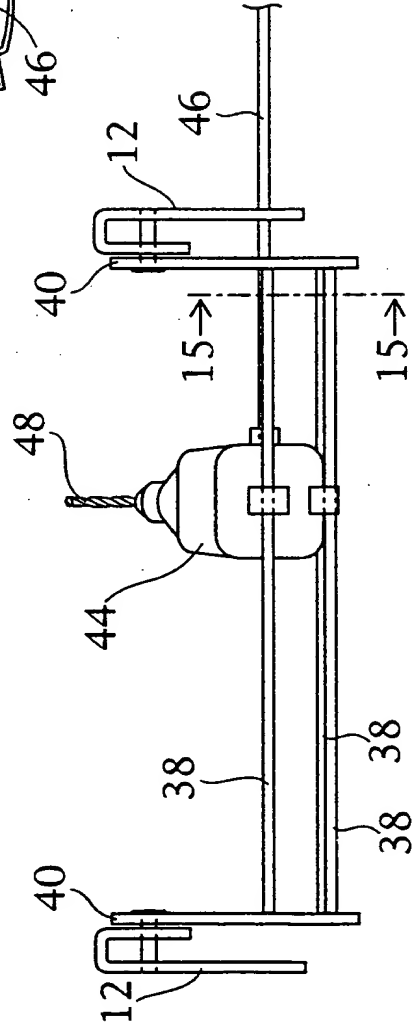
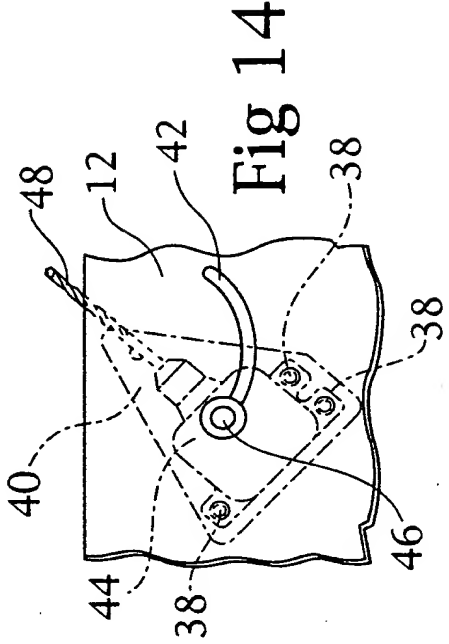
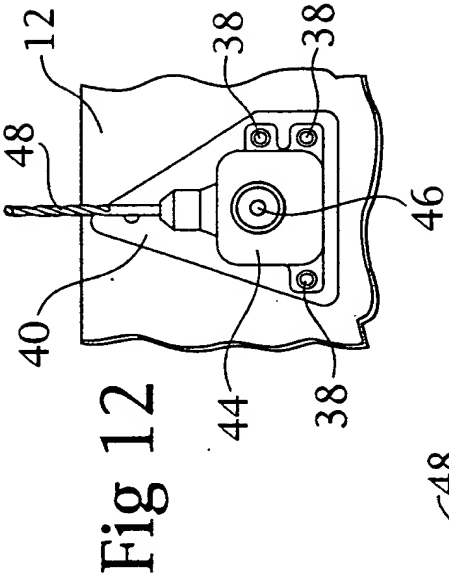
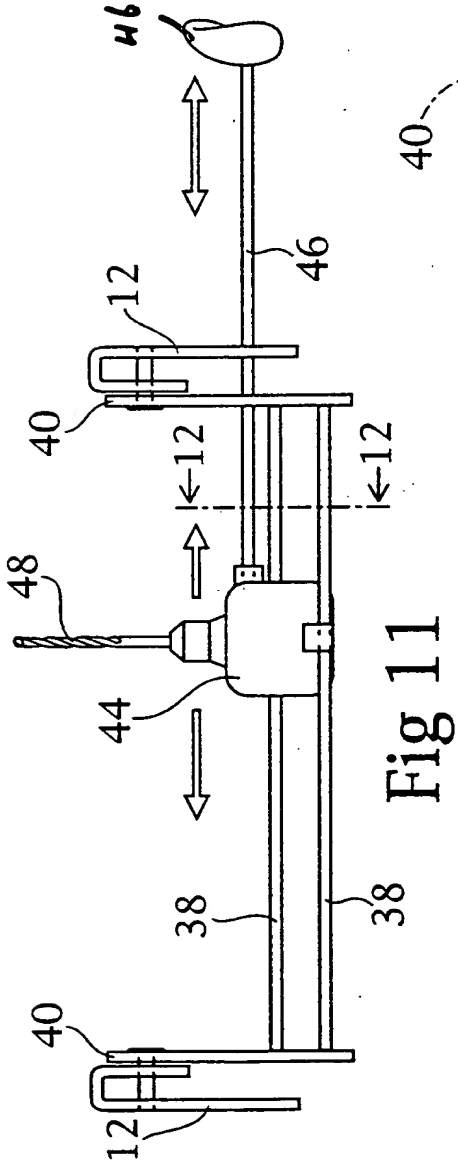
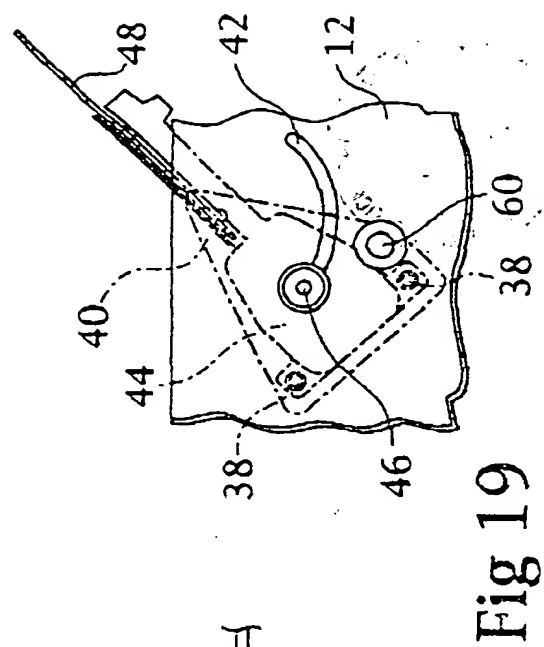
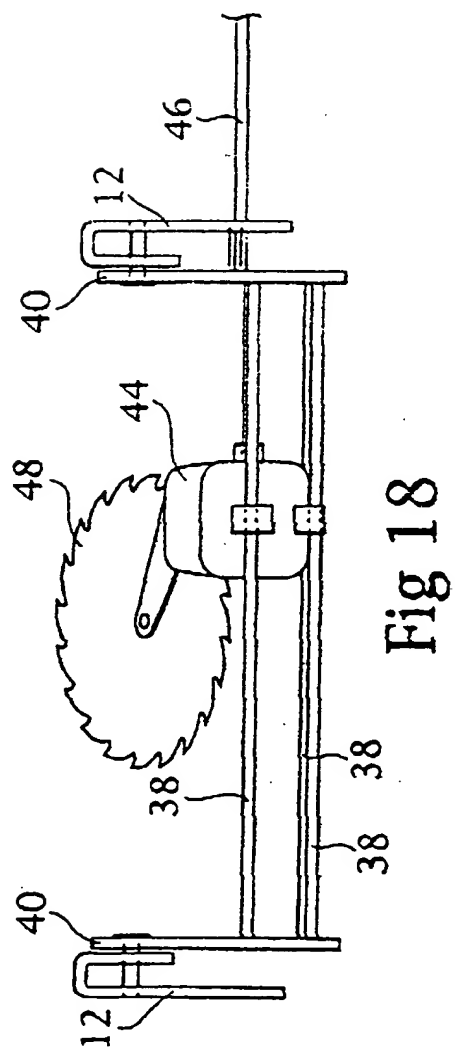
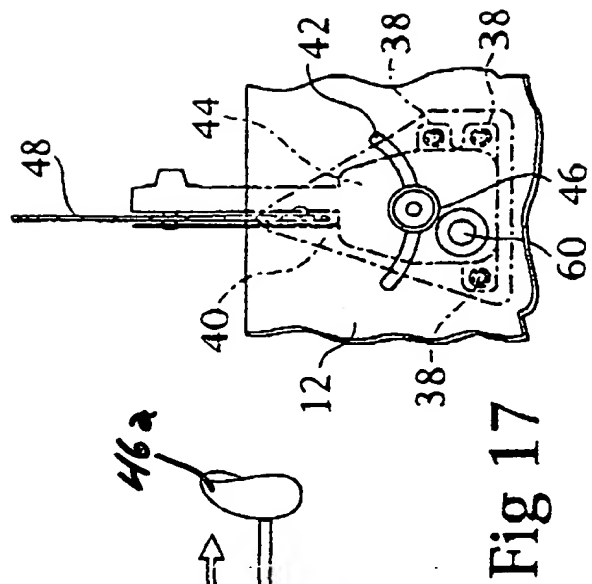
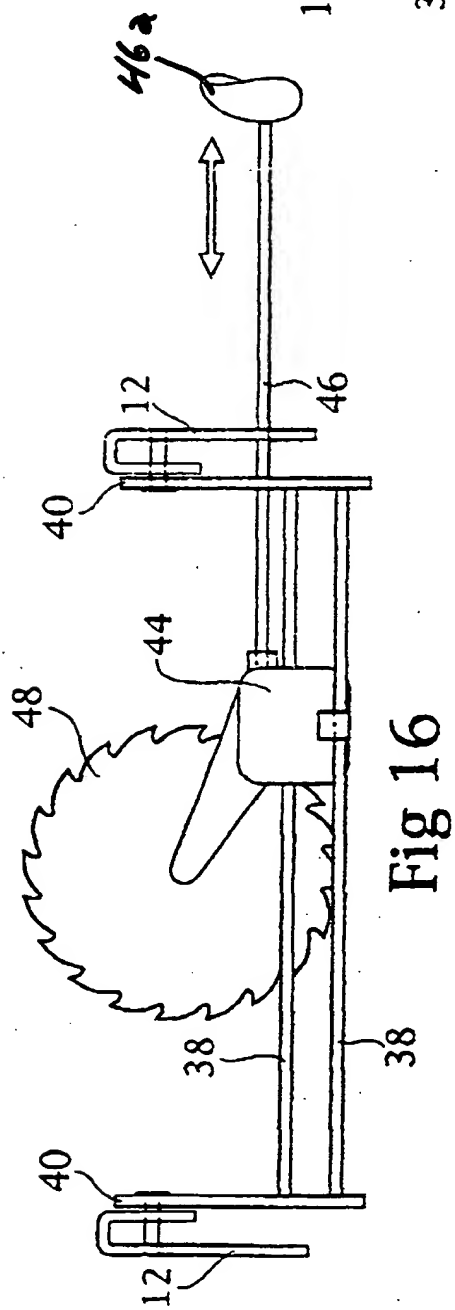


Fig 10







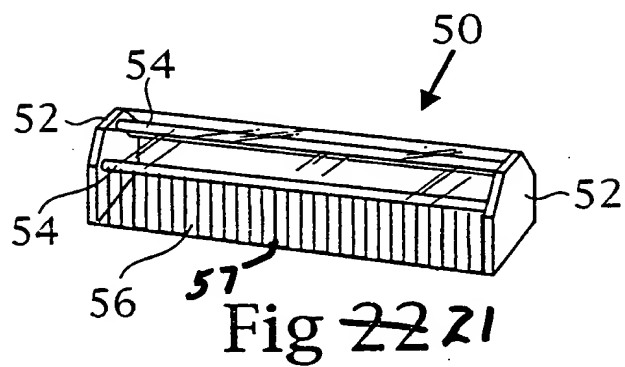
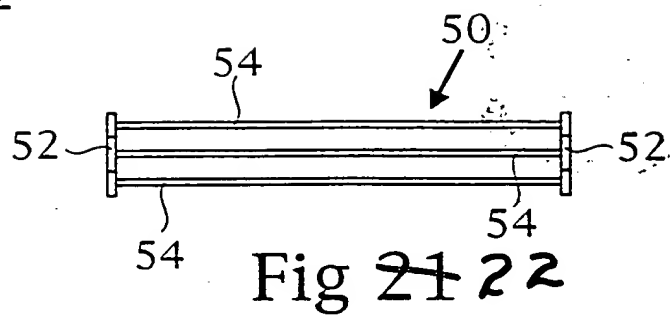
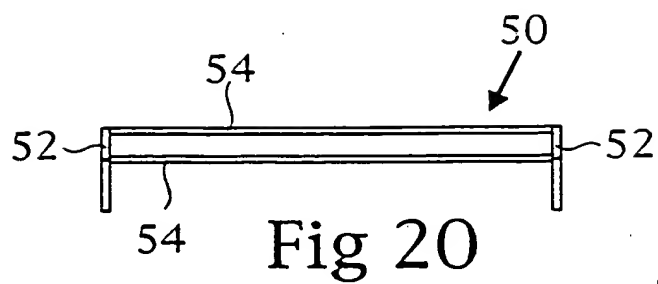


Fig 22

Fig 21

Fig 20

Fig 23

Fig 24

Fig 25

Fig 26

Fig 27

Fig 28

Fig 29

Fig 30

Fig 31

Fig 32

Fig 33

Fig 34

Fig 35

Fig 36

Fig 37

Fig 38

Fig 39

Fig 40

Fig 41

Fig 42

Fig 43

Fig 44

Fig 45

Fig 46

Fig 47

Fig 48

Fig 49

Fig 50

Fig 51

Fig 52

Fig 53

Fig 54

Fig 55

Fig 56

Fig 57

Fig 58

Fig 59

Fig 60

Fig 61

Fig 62

Fig 63

Fig 64

Fig 65

Fig 66

Fig 67

Fig 68

Fig 69

Fig 70

Fig 71

Fig 72

Fig 73

Fig 74

Fig 75

Fig 76

Fig 77

Fig 78

Fig 79

Fig 80

Fig 81

Fig 82

Fig 83

Fig 84

Fig 85

Fig 86

Fig 87

Fig 88

Fig 89

Fig 90

Fig 91

Fig 92

Fig 93

Fig 94

Fig 95

Fig 96

Fig 97

Fig 98

Fig 99

Fig 100

Fig 101

Fig 102

Fig 103

Fig 104

Fig 105

Fig 106

Fig 107

Fig 108

Fig 109

Fig 110

Fig 111

Fig 112

Fig 113

Fig 114

Fig 115

Fig 116

Fig 117

Fig 118

Fig 119

Fig 120

Fig 121

Fig 122

Fig 123

Fig 124

Fig 125

Fig 126

Fig 127

Fig 128

Fig 129

Fig 130

Fig 131

Fig 132

Fig 133

Fig 134

Fig 135

Fig 136

Fig 137

Fig 138

Fig 139

Fig 140

Fig 141

Fig 142

Fig 143

Fig 144

Fig 145

Fig 146

Fig 147

Fig 148

Fig 149

Fig 150

Fig 151

Fig 152

Fig 153

Fig 154

Fig 155

Fig 156

Fig 157

Fig 158

Fig 159

Fig 160

Fig 161

Fig 162

Fig 163

Fig 164

Fig 165

Fig 166

Fig 167

Fig 168

Fig 169

Fig 170

Fig 171

Fig 172

Fig 173

Fig 174

Fig 175

Fig 176

Fig 177

Fig 178

Fig 179

Fig 180

Fig 181

Fig 182

Fig 183

Fig 184

Fig 185

Fig 186

Fig 187

Fig 188

Fig 189

Fig 190

Fig 191

Fig 192

Fig 193

Fig 194

Fig 195

Fig 196

Fig 197

Fig 198

Fig 199

Fig 200

Fig 201

Fig 202

Fig 203

Fig 204

Fig 205

Fig 206

Fig 207

Fig 208

Fig 209

Fig 210

Fig 211

Fig 212

Fig 213

Fig 214

Fig 215

Fig 216

Fig 217

Fig 218

Fig 219

Fig 220

Fig 221

Fig 222

Fig 223

Fig 224

Fig 225

Fig 226

Fig 227

Fig 228

Fig 229

Fig 230

Fig 231

Fig 232

Fig 233

Fig 234

Fig 235

Fig 236

Fig 237

Fig 238

Fig 239

Fig 240

Fig 241

Fig 242

Fig 243

Fig 244

Fig 245

Fig 246

Fig 247

Fig 248

Fig 249

Fig 250

Fig 251

Fig 252

Fig 253

Fig 254

Fig 255

Fig 256

Fig 257

Fig 258

Fig 259

Fig 260

Fig 261

Fig 262

Fig 263

Fig 264

Fig 265

Fig 266

Fig 267

Fig 268

Fig 269

Fig 270

Fig 271

Fig 272

Fig 273

Fig 274

Fig 275

Fig 276

Fig 277

Fig 278

Fig 279

Fig 280

Fig 281

Fig 282

Fig 283

Fig 284

Fig 285

Fig 286

Fig 287

Fig 288

Fig 289

Fig 290

Fig 291

Fig 292

Fig 293

Fig 294

Fig 295

Fig 296

Fig 297

Fig 298

Fig 299

Fig 300

Fig 301

Fig 302

Fig 303

Fig 304

Fig 305

Fig 306

Fig 307

Fig 308

Fig 309

Fig 310

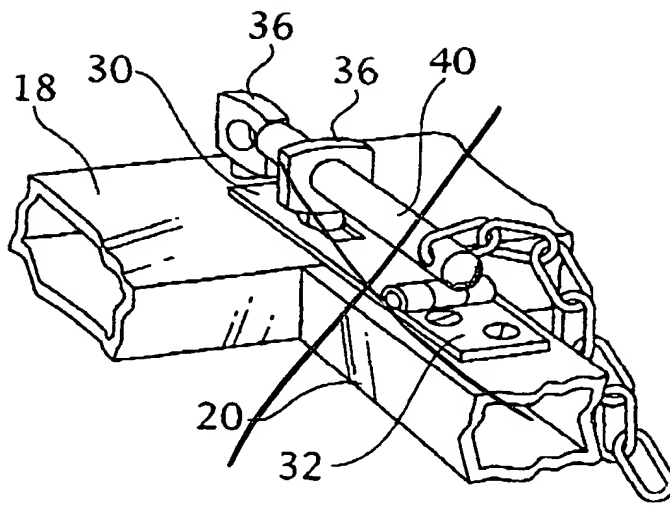


Fig 20

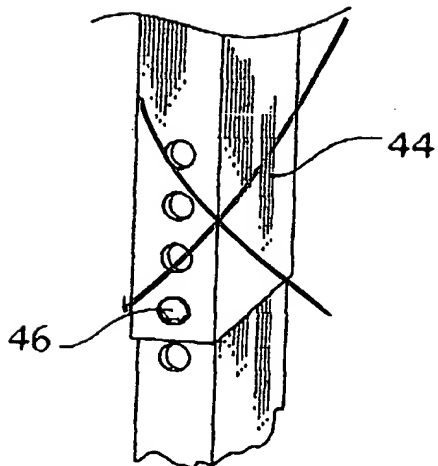


Fig 21

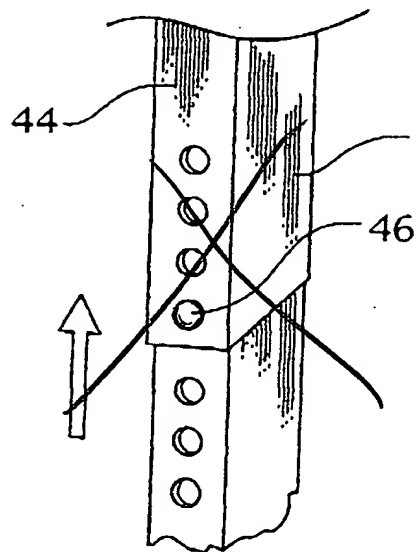


Fig 22

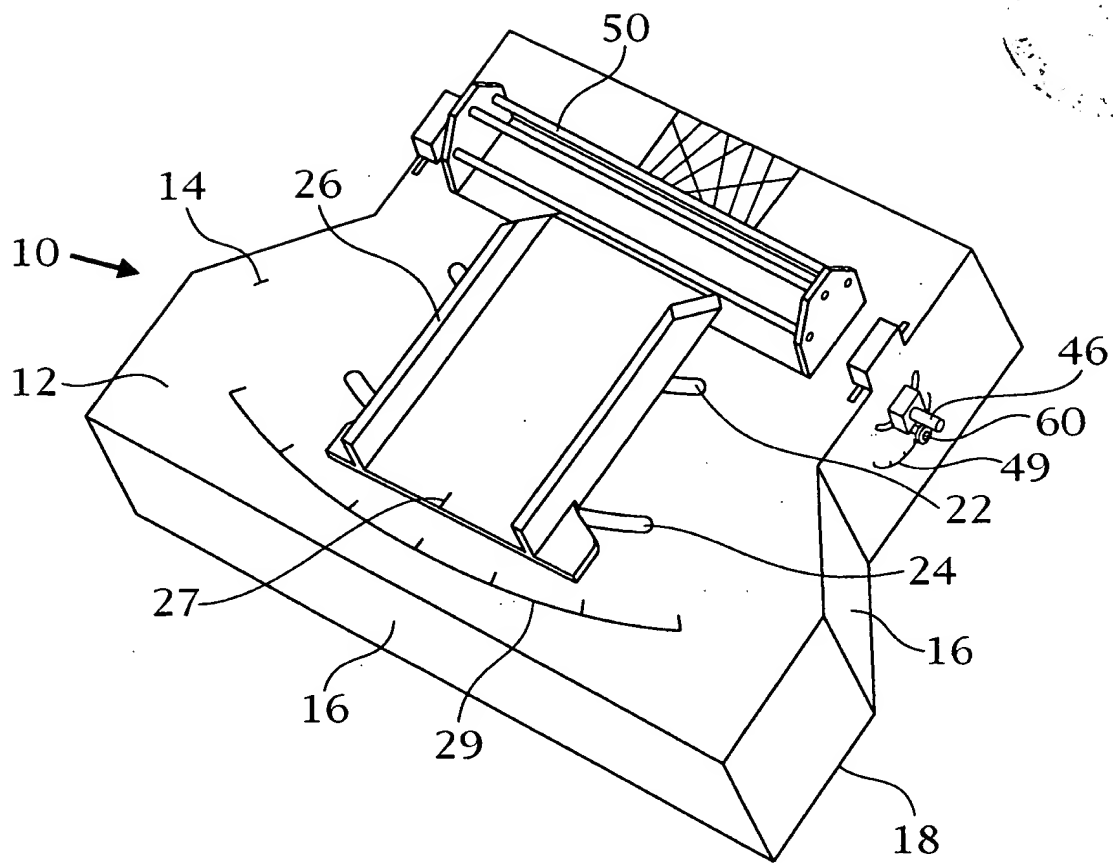


Fig 1

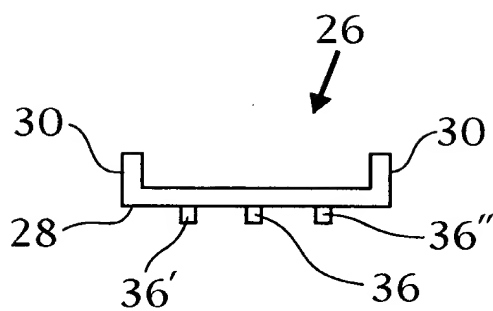


Fig 3

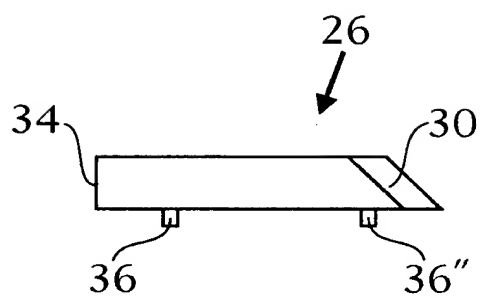


Fig 4

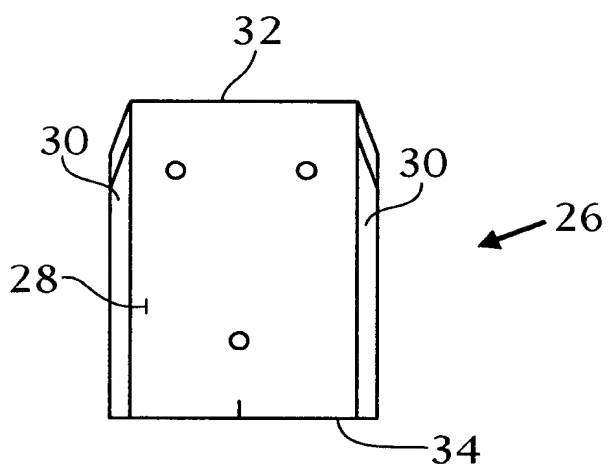
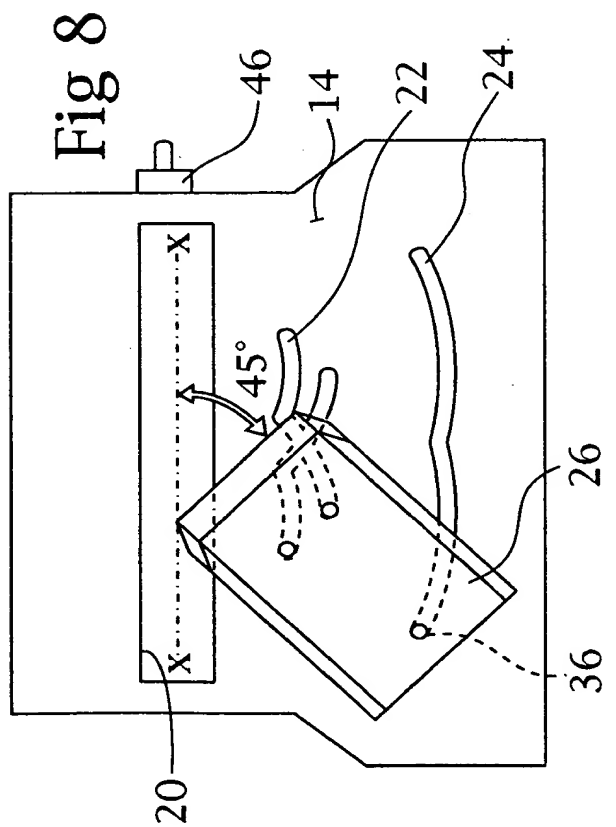
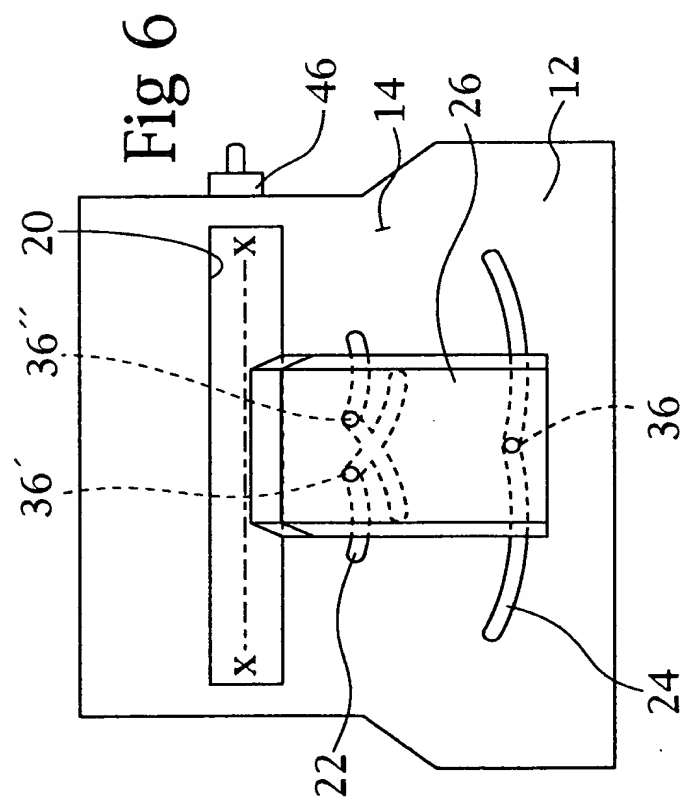
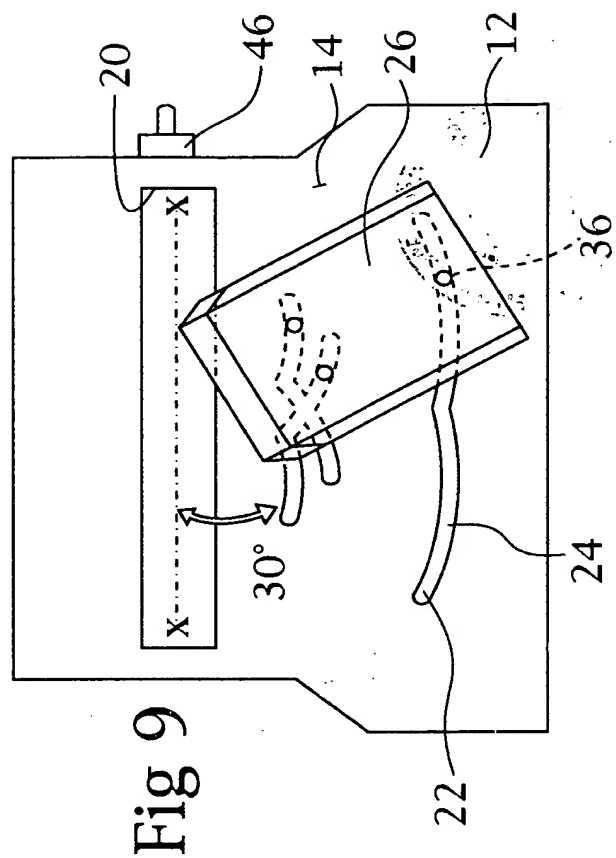
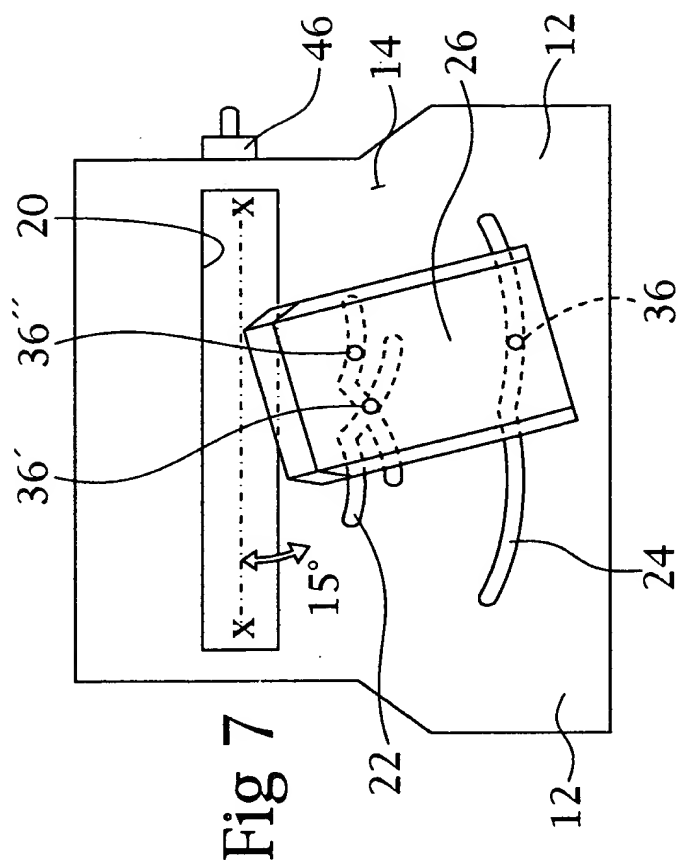


Fig 5



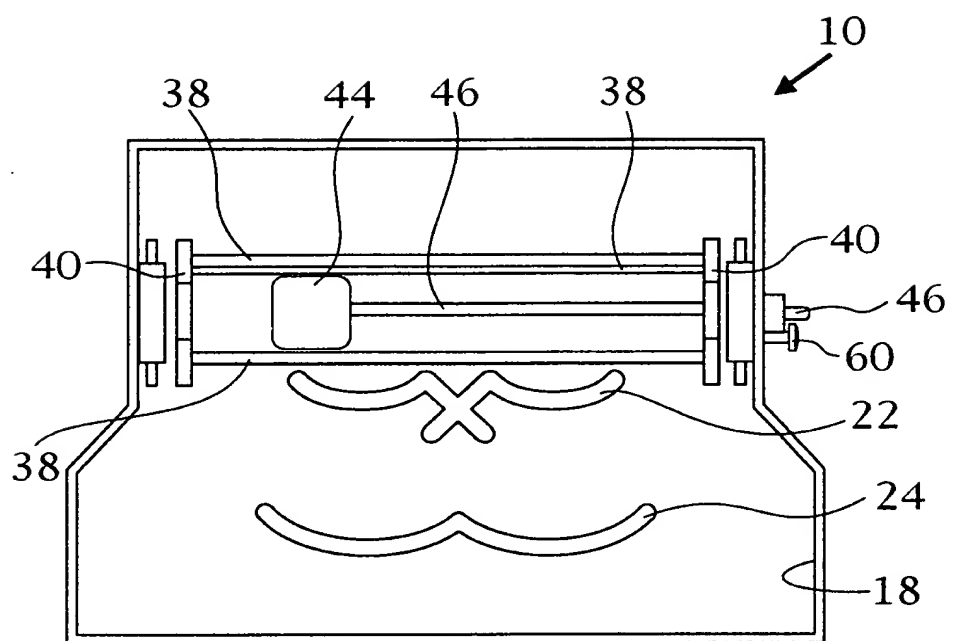


Fig 10

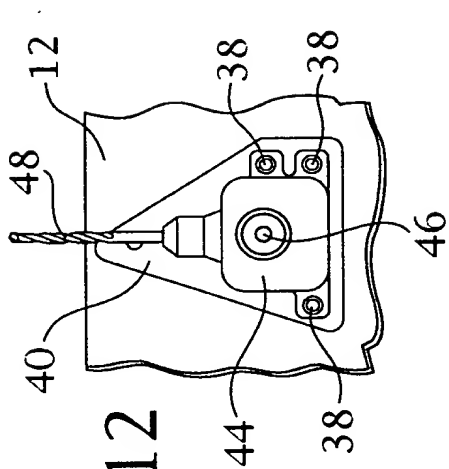


Fig 11

Fig 12

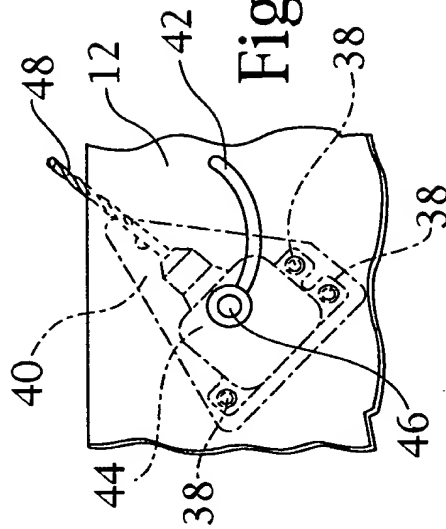


Fig 14

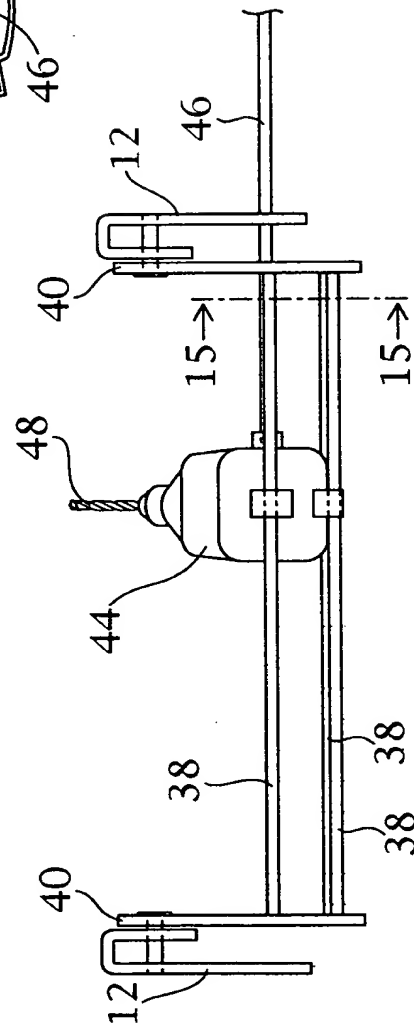


Fig 13

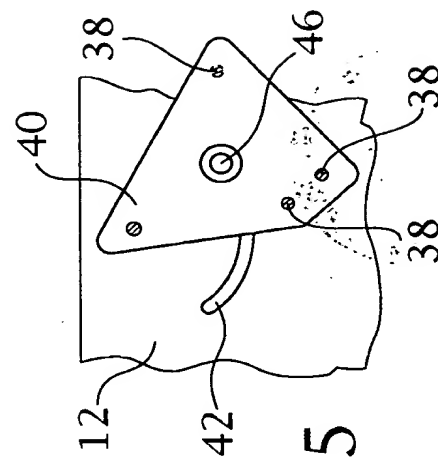


Fig 15



